

Universitat de Lleida

Document downloaded from:

<http://hdl.handle.net/10459.1/72390>

The final publication is available at:

<https://doi.org/10.1016/j.ifset.2020.102517>

Copyright

cc-by-nc-nd (c) Elsevier, 2020



Està subjecte a una llicència de [Reconeixement-NoComercial-SenseObraDerivada 4.0 de Creative Commons](https://creativecommons.org/licenses/by-nc-nd/4.0/)

Effectiveness of pulsed light treatments assisted by mild heat on *Saccharomyces cerevisiae* inactivation in verjuice and evaluation of its quality during storage

Zehra Kaya¹, Sevcen Unluturk¹, Olga Martin-Belloso², Robert Soliva-Fortuny^{2*}

¹Department of Food Engineering, Izmir Institute of Technology, 35430, Urla, İzmir, Turkey

²Department of Food Technology, University of Lleida - Agrotecnio Center, 25198, Lleida, Spain

Direct inquiries to author Robert Soliva-Fortuny

E-mail: robert.soliva@udl.cat

ABSTRACT

The effects of pulsed light (PL) processing parameters such as depth of juice layer (1, 3, 5 mm), distance from the lamp (5, 10 cm) and number of pulses (0-50 pulses) on the inactivation of *Saccharomyces cerevisiae* in verjuice, a clarified beverage obtained from freshly-squeezed unripe grapes, were investigated. A reduction of 0.96 ± 0.27 log CFU/mL was achieved by applying a dose of 34 J/cm^2 (1-mm layer depth, 5-cm distance, 50 pulses). PL was combined with mild heating (MH) at 43, 45 and 47 °C to increase its inactivation efficacy. Pasteurization was achieved by applying 17 J/cm^2 at 45°C (PLMH45-3) and 6.12 J/cm^2 at 47°C (PLMH47-3) to a 3-mm juice layer with *S. cerevisiae* reductions of 5.10 ± 0.24 and 5.06 ± 0.08 log CFU/mL, respectively. Quality properties of PLMH47-3-pasteurized verjuice were monitored during 6 weeks of storage at refrigerated (5 °C) and room temperature (25 °C), The results were compared to those of untreated and thermally pasteurized (72°C/18 s) samples. Untreated juice spoiled within 2 weeks at 25°C. No growth was detected in other conditions for 6 weeks. Among quality characteristics, only optical properties changed slightly during storage. It was concluded that mild MH-assisted pulsed light treatments have potential for verjuice pasteurization compared to conventional thermal pasteurization due to the better preservation of its fresh-like characteristics.

Keywords: Pulsed light, mild heating, *Saccharomyces cerevisiae*, verjuice, storage, juice quality

1. INTRODUCTION

Verjuice (green juice, unripe grape juice) is an unfermented grape juice obtained by squeezing unripe table grapes. It has a specific aroma, flavour and sour taste (Aminian, Massoompour, Sadeg, & Omrani, 2003). Verjuice is generally used in Mediterranean and Southeastern Anatolia region as a savoury alternative to vinegar and lemon juice in traditional meals, vegetable salads and snacks to give flavour, and mixed as an ingredient in several alcoholic beverages and sauces (Oncul & Karabiyikli, 2015). Besides, it has antimicrobial and antioxidant properties (Aminian, Aminian, Nekooian, & Hoseinali, 2006; Karapinar & Sengun, 2007; Setorki, Asgary, Eidi, & Haeri Rohani, 2010). Verjuice is usually produced under household conditions that is not used any technological process. Thus, it is prone to microbial spoilage caused by yeasts and molds naturally growing in grapes (Hayoglu, Kola, Kaya, Ozer, & Turkoglu, 2009). Several yeasts (*Pichia*, *Candida*, *Saccharomyces*, *Rhodotorula*) and molds (*Penicillium* sp., *Aspergillus* sp., *Eurotium*, *Alternaria*, *Cladosporium*, *Paecilomyces*, *Botrytis*) have been reported as spoilage microorganism in fruit juices (Aneja, Dhiman, Aggarwal, Kumar, & Kaur, 2014). Therefore, verjuice produced at household condition have been under the risk against spoilage and quality degradation.

Thermal pasteurization is traditionally used in fruit juices to inactivate pathogens and spoilage microorganisms, as well as enzyme spoilers. According to the Food and Drug Administration (FDA) regulation mandated by Hazard Analysis and Critical Control Point (HACCP) programme, “5-log reduction in the number of target microorganism is found to be necessary for fruit juice pasteurization” (U.S. FDA, 2001). However, the pasteurization term was re-defined and extended by the USDA National Advisory Committee on Microbiological Criteria for Foods (NACMCF) as “Any process, treatment, or combination thereof that is applied to food to reduce the most resistant microorganism(s) of public health significance to a level that is not likely to present a public health risk under normal conditions of distribution and

storage” (NACMCF, 2006). The thermal treatment in juice processing is principally performed at 65 °C for 30 min, 77 °C for 1 min and 88 °C for 15 s (Miller & Silva, 2012). However, these treatments may lead to important chemical and physical changes that impair organoleptic properties, degrade nutrients and reduce the content of some bioactive compounds (Gómez, Welti-Chanes, & Alzamora, 2011; Tiwari, O'Donnell, & Cullen, 2009; Wang, Guo, Ma, Zhao, & Zhang, 2018). Therefore, the application of mild thermal treatments in combination with other technologies is sought by fruit juice processors in order to maintain the taste of the product while preserving their nutritional value (Vervoort et al., 2011). Besides, alternative nonthermal technologies have been developed in order to fulfill the demands of consumers and prevent the undesirable effects of thermal pasteurization (Raso & Barbosa-Cánovas, 2003).

Pulsed light (PL) technology is used as a nonthermal processing method to eliminate pathogenic and spoilage microorganisms in foods. It is applied to solid and liquid foods by using short time (1 μ s to 0.1 s) high-peak pulses between 200 and 1100 nm (Barbosa-Cánovas, Pothakamury, Palou, & Swanson, 1998; Oms-Oliu, Martín-Belloso, & Soliva-Fortuny, 2010). PL can be described as a multi-target inactivation process with photochemical (cellular DNA damage), photothermal (cell overheating) and photophysical (cell membrane destruction) effects being involved (Gómez-López, Ragaert, Debevere, & Devlieghere, 2007; Krishnamurthy, Demirci, & Irudayaraj, 2007). It has been reported that the UV-C region (200-280 nm) has a great impact on the inactivation of microorganisms (Gómez-López et al., 2007; Koutchma, 2008). FDA has approved the use of PL on foods and food surfaces under strict conditions (U.S. FDA, 1996). Some critical factors affect the performance of PL, including the distance from the lamp, sample thickness, contamination level of sample and sample composition (Gómez-López et al., 2007). Studies on PL indicate that this technology could be a promising alternative method for the decontamination of several solid foods, such as meat products (Ganan, Hierro, Hospital, Barroso, & Fernández, 2013), vegetables (Gómez-López,

Devlieghere, Bonduelle, & Debevere, 2005) and fruits (Koh, Noranizan, Karim, & Nur Hanani, 2016), as well as liquid foods, such as fruit juices (Ferrario, Alzamora, & Guerrero, 2013; Maftai, Ramos-Villarroel, Nicolau, Martin-Belloso, & Soliva-Fortuny, 2014; Sauer & Moraru, 2009). PL technology can also be combined with other technologies (ultrasound, thermosonication, mild heating, etc.) to increase its antimicrobial effect in foods (Ferrario, Alzamora, & Guerrero, 2015; Hilton, de Moraes, & Moraru, 2017; Muñoz et al., 2011).

The main objective of this study was to evaluate the efficacy of the PL technology to extend the shelf-life of verjuice with a maximum quality. The first part of this work pertained to the application of PL treatments alone or in combination with mild heat conditions. In this part, the effect of various PL processing parameters, such as the depth of juice layer, distance from the lamp and the number of pulses on the logarithmic reduction of a target microorganism in verjuice, *i.e.* *Saccharomyces cerevisiae* (NRRL Y-139), were investigated. In the second part, several quality properties of PL-pasteurized verjuice were monitored and compared to those of thermally pasteurized and untreated verjuice samples throughout storage. This study could add novel information to the literature because it could not be found any study on the inactivation of yeasts in fruit juices by using combined pulsed light and MH treatments as a hurdle method. Besides, traditionally produced verjuice can be industrially pasteurized and market by using the data of this study.

2. MATERIALS AND METHODS

2.1. Preparation and Characterization of Verjuice

Freshly squeezed verjuice was prepared from Yediveren variety of unripe grapes (*Vitis vinifera* L.) purchased from vineyards in Urla region of Izmir, Turkey. Unripe grapes were harvested based on their maturity index (Eq. 1) (Palomo, Díaz-Maroto, Viñas, Soriano-Pérez, & Pérez-Coello, 2007).

127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151

$$Maturity\ index = \frac{Soluble\ solid\ content\ (^{\circ}brix)}{Acidity\ (g/L)} \quad (1)$$

Detartarisation was applied to freshly squeezed verjuice by keeping the juice refrigerated (5 °C) for 1 day to precipitate tartrate particles. After filtering, clear verjuice was thermally pasteurized (72 °C/18 s) in order to eliminate background biota before inactivation studies.

Physicochemical properties of verjuice were determined before PL treatment. The pH, total soluble solid content (°Brix), absorption coefficient (cm⁻¹) and turbidity (NTU) of verjuice were measured using a bench-top pH meter (Crison Instruments SA, Barcelona, Spain), a hand-held refractometer (Palette PR-32, Atago USA, Inc.), a spectrophotometer (Jasco V-650, Jasco Europe Srl, Italy) and a portable turbidimeter (HI 98703, Hanna Instruments, Inc., USA), respectively. The CIE color parameters *L**, *a**, *b**, were measured directly using a Minolta CR-400 chromameter (Konica, Inc., Japan). Physicochemical characteristics of verjuice are shown in Table 1. Additionally, hue angle (*h*°) and chroma (*C**) values were calculated according to equations displayed in Table 1.

2.2. Microbiological Analysis:
Background Microbiota

Total mesophilic aerobic bacteria (TMAC), yeasts and molds (YMC), and total coliforms (TC) of verjuice were counted by spread-plating on Plate Count Agar (PCA, Merck, Darmstadt, Germany), Potato Dextrose Agar (PDA, Difco Laboratories, Detroit, Mich) acidified to pH 3.5 with 10% tartaric acid (Merck, Darmstadt, Germany) and Violet Red Bile Agar (VRBA, Merck, Darmstadt, Germany) plates, respectively. PCA, PDA and VRBA plates were then incubated at 30 °C for 48 h, at 25 °C for 2-5 days and at 37 °C for 24 h, respectively. No background microorganisms (TMA, YMC and TC) were detected in verjuice.

Target Microorganism and Acid Adaptation Study

Verjuice was initially fermented in order to decide on a dominating strain with spoilage potential that would be used in further inoculation studies. For this purpose, freshly squeezed verjuice was obtained from the unwashed berries and placed in a shaker (Thermo Electron Corp., Ohio, USA) and shook at 200 rpm and 30 °C for a couple of days. At the end of natural fermentation trials, several moulds and yeasts species were detected in the verjuice samples. On the basis of the results, yeasts were the main microorganism causing spoilage of verjuice. Thus, *Saccharomyces cerevisiae* (NRRL Y-139) was selected as the target microorganism in verjuice to evaluate the efficiency of the processes.

Stock cultures of *S. cerevisiae* containing 25% glycerol were stored at -80 °C at University of Lleida before use. *S. cerevisiae* was cultured in yeast extract-peptone-dextrose (YPD) broth (manually prepared from 10 g yeast extract, 20 g peptone and 20 g dextrose per 1 L distilled water). *S. cerevisiae* colonies were spread on acidified PDA plates (pH 3.5) and enumerated after incubation at 30 °C for 48 h. Stock cultures were enriched in a flask containing Yeast-Extract-Peptone-Dextrose (YPD) broth and incubated overnight (24 h) at 30 °C and 200 rpm before inoculation.

S. cerevisiae cells did not survive in the acidic conditions of verjuice after direct inoculation from the stock culture. Thus, cells were first adapted to high acidic conditions by gradually reducing the pH of the YPD broth with the addition of 10% tartaric acid. Firstly, 100 µL of the stock culture of *S. cerevisiae* was inoculated in 100-mL YPD broth (pH 3.5) and incubated in a shaker at 200 rpm and 30 °C for 24 h. After incubation, 1 mL of enriched cells was transferred to the YPD broth at pH 2.7, and incubated in the shaker for 48 h under the same conditions (30 °C, 200 rpm) until cell counts reached 10⁶ CFU/mL. The acid-adapted yeast cells were inoculated into verjuice and enumerated on PDA at several different time intervals during incubation (30 °C, 200 rpm). It was observed that the number of viable yeast cells did not

significantly change in the highly acidic conditions of verjuice during incubation for 6 h. The acid-adapted *S. cerevisiae* cells were then collected and plated on the PDA slants (acidified to pH 3.5 with 10% tartaric acid), incubated at 30 °C for 2 days and then stored at 5 °C before use in microbial inactivation experiments.

2.3. Processing of Verjuice

Verjuice samples were inoculated with acid-adapted *S. cerevisiae* cells with an initial load of $\sim 10^4$ - 10^5 CFU/mL (4-5 log CFU/mL) to mimic “the worst-case scenario” occurring in a spoiled product. Then, inoculated verjuice samples were exposed to pulsed light (PL), mild heating (MH) and to a combination of PL and MH treatments (PLMH), separately, to determine the best processing conditions ensuring 5 log reductions of *S. cerevisiae*, as proposed by Gabriel (2012). All the processes and experimental conditions used in this study are listed in Table 2.

2.3.1. Pulsed Light treatments

Verjuice inoculated with acid-adapted *S. cerevisiae* was exposed to PL by using an automatic laboratory-scale bench-top XeMaticA-2L System (SteriBeam Systems GmbH, Germany). The device consists of a standard air-cooled 18-cm long UV-C transparent quartz xenon lamp located above the device, a stainless-steel table, a chamber door, and power and control panels. The emitted spectrum in the system ranged from 180 to 1100 nm, with 15-20% of the light in the UV region. Samples were placed on a shelf situated 5 or 10 cm below the light source and were irradiated with flashes of a duration of 0.3 ms with energy densities of 0.68 and 0.34 J/cm²/pulse.

For PL processing, verjuice was poured into a 5 cm-diameter petri dish and inoculated with acid-adapted *S. cerevisiae*. Different depths of verjuice layer (1, 3, or 5 mm) and distance from the xenon lamp (5 or 10 cm) were assayed. The samples were exposed to up to 50 pulses and stirred once every 10 pulses to prevent overheating. Lethal heating did not occur during the

treatment as temperature was under 35 °C. The overall PL dose after treatments was calculated as 34 J/cm² and 17 J/cm² for a distance of 5 and 10 cm, respectively.

In order to calculate fluence in the system, energy calculation was firstly carried out by using a photodiode detector located at different distances (from 4 to 14 cm) from the lamp. Then, an oscilloscope was connected to the photodetector and the obtained signals converted to radiance values by using a standard light source and a calibration curve drawn according to the manufacturer's instructions. The exponential equation of the curve plotted between the fluence and distance data was found as $y=3.3743x^{-1.004}$, where x is the distance (cm), and y is the fluence (J/cm²). This equation was used to calculate the corresponding fluence at a desired distance. Fluence values for the sample surfaces located 10 and 5 cm away from the lamp were calculated as 0.34 and 0.68 J/cm²/pulse, respectively. The total PL dose (J/cm²) applied to verjuice was determined by multiplying the number of pulses of each treatment by the fluence per pulse.

2.3.2. Mild Heating treatments

A glass-jacketed beaker (3, 5 mm juice layer) connected to a temperature-controlled water bath was used. The internal temperature of verjuice in the beaker was adjusted to 43, 45 and 47 °C (Table 2) and kept constant by controlling with a K-type thermocouple. Verjuice inoculated with *S. cerevisiae* was subjected to MH treatments: 43 °C for 20 min, 45 °C for 20 min and 47 °C for 8.5 min, respectively (yeast counts were below the detection limit beyond 8.5 min at 47°C). Samples taken at specific intervals during the MH treatments were rapidly cooled in an ice bath. The efficacy of MH treatment on the inactivation of *S. cerevisiae* in verjuice was then evaluated by enumerating the *S. cerevisiae* colonies on PDA using a spread plating technique before and after the application of the MH treatments.

2.3.3. Pulsed Light treatments Assisted with Mild Heating

The combined treatment (PLMH) was studied as a hurdle technology approach. Verjuice was poured into the jacketed beaker used in MH treatment, placed into the PL treatment

chamber and connected to the water bath. The verjuice temperature was adjusted to 43, 45 and 47 °C and checked with a K-type thermocouple. Next, the verjuice inoculated with *S. cerevisiae* and placed 10 cm away from the lamp was exposed to simultaneous PL and MH treatment (Table 2). The total number of pulses in the combined treatments was adjusted by considering the overall exposure time to the MH conditions. Samples were removed at specific pulse intervals and immediately cooled in an ice bath. The *S. cerevisiae* counts in the verjuice samples were evaluated by spread plating on PDA.

2.4. Evaluation of verjuice quality and shelf-life through storage

Shelf-life of pasteurized verjuice samples was evaluated by monitoring microbiological, physicochemical, optical, and antioxidant activity properties under refrigerated (5 °C) and room temperature (25 °C) conditions for 6 weeks.

Freshly squeezed verjuice was pasteurized using the PLMH47-3 treatment (6.12 J/cm² dose + 47 °C for 8.5 min), hence achieving 5 log reductions of *S. cerevisiae*. Thermally pasteurized (P) and untreated (U) verjuice samples were used as positive and negative controls. Conventional thermal pasteurization (72 °C for 18 s) was also applied to verjuice by using a continuous system composed of a stainless-steel capillary tube, a pump, a thermostatic bath (Huber GmbH, Offenburg, Germany) and a cooling cabinet (adjusted to 5 °C). The pasteurized and cooled verjuice was collected into a 1 L sterile glass bottle and used for the shelf-life study.

Approximately 25-30 mL of the untreated and pasteurized verjuice samples were transferred to sterile dark glass bottles (50 mL) and stored under refrigerated and room temperature conditions for 6 weeks, with periodic sampling at 0, 1, 2, 4 and 6 weeks. The temperatures were checked during storage at specific time intervals.

All verjuice samples were analysed for microbiologically by counting total aerobic mesophilic count (TAMC), yeasts and molds count (YMC) and total coliforms (TC),

physicochemical (pH, TSS content, TA), optical (absorption coefficient, turbidity, color) and the antioxidant (DPPH· scavenging activity) attributes. Physicochemical and optical properties were determined as outlined in section 2.1. Total color difference (ΔE) and browning index (BI) were also calculated using Eq. (2) and Eq. (3), respectively.

$$\Delta E = \sqrt{(\Delta L^*)^2 + (\Delta a^*)^2 + (\Delta b^*)^2} \quad (2)$$

$$BI = 100 * \frac{\frac{(a^* + 1.75 L^*)}{(5.645 L^* + a^* - 3.012 b^*)} - 0.31}{0.172} \quad (3)$$

The antioxidant activity of verjuice samples was investigated by the 2,2-diphenyl-1-picrylhydrazyl (DPPH) radical scavenging method proposed by Pataro, Sinik, Capitoli, Donsi, and Ferrari (2015) with slight modifications. A reagent solution consisting of 3.9 mL of daily-prepared DPPH methanolic solution (25 ppm), 10 μ L verjuice sample and 90 μ L deionized water were placed in plastic cuvettes and the mixture was kept in the dark at 20 °C for 60 min. The blank sample was composed of 3.9 mL DPPH solution and 100 μ L deionised water instead of verjuice. Autozero was done with methanol. Absorbance of the cuvettes was measured at 515 nm. The antioxidant activity was referred to the DPPH radical inhibition (%) as defined by Eq. (4), where the absorbance of the sample (after 60 min) and blank were identified as A_s and A_b , respectively.

$$DPPH \text{ inhibition } (\%) = 100 - \left(\frac{A_s}{A_b} \times 100 \right) \quad (4)$$

2.5. Statistical Analyses

All the experiments carried out in this work were repeated thrice. Regression analysis was applied by using a commercial spreadsheet (Microsoft Excel, Redmond, WA, USA). One-way analysis of variance (ANOVA) was done to determine how significantly the independent variables (treatments) affected the changes in the dependent variables (quality properties) during the shelf-life of verjuice. The means of data were compared by Tukey's pairwise comparison test at a 95% confidence interval ($p \leq 0.05$). Minitab 16 software program (Minitab, Inc., State College, PA, USA) was used for the one-way ANOVA and LSD test of the results.

3. RESULTS AND DISCUSSION

3.1. Effect of PL, MH and their combination on the inactivation of *S. cerevisiae* in verjuice

PL had little lethal effect on *S. cerevisiae* cells in verjuice under studied conditions (Figure 1). The depth of juice layer and the distance from the lamp, thus the amount of incident energy, was found to be the most critical factor affecting the efficiency of PL process in this study. The highest reduction (0.96 ± 0.27 log CFU/mL) was obtained when delivering a dose of 34 J/cm^2 in a 1-mm layer of juice sample placed 5 mm away from the lamp [PL5-1] (Figure 1a). Besides, for a same distance from the lamp (5 cm) and irradiance (34 J/cm^2), the reductions of *S. cerevisiae* in 3 mm-deep [PL5-3] and 5 mm-deep [PL5-5] juice layers were significantly lower (0.35 ± 0.03 log CFU/mL and 0.52 ± 0.01 log CFU/mL, respectively) without significant differences between them ($p > 0.05$). It has been reported that 90% of the light can pass through only the first 1 mm layer of the juices (Keyser, Muller, Cilliers, Nel, & Gouws, 2008; Sizer & Balasubramaniam, 1999). On the other hand, for a distance to the lamp of 10 cm, only 0.60 ± 0.03 log CFU/mL reduction was achieved for a fluid depth and UV irradiance of 1 mm [PL10-1] and 17 J/cm^2 (Figure 1b) ($p \leq 0.05$). The impact of PL technology on the inactivation of acid-adapted *S. cerevisiae* strains in verjuice of different depths and distances from the xenon lamp was also

301 summarized in Table 3. According to Table 3, there was no statistical difference between the
302 microbial reduction in verjuice having 3 mm and 5 mm depth exposed to PL at 5 cm distance.
303 However, the number of the cells were significantly reduced in the 1 mm verjuice depth exposed
304 at the same distance ($p \leq 0.05$). Similarly, there was a significant difference between the *S.*
305 *cerevisiae* reduction in verjuice having 1 and 5 mm depth 10 cm distance ($p \leq 0.05$). Therefore,
306 the depth of juice layer was an important factor in this PL system. In the verjuice having 1 mm
307 depth, the reduction of *S. cerevisiae* at a distance of 5 cm was significantly greater compared to
308 10 cm distance ($p \leq 0.05$). However, the distance was not a key parameter in the inactivation
309 efficacy of the PL system when using 3 and 5 mm depths of verjuice. The reason for the reduced
310 efficacy of the PL system could be the less dose calculated for the 10 cm distance (17 J/cm^2)
311 relative to the 5 cm distance (34 J/cm^2) from the xenon lamp. Similarly, Artíguez, Lasagabaster,
312 and Maraón (2011) and Said, Federighi, Bakhrouf, and Orange (2010) indicated that a high
313 microbial inactivation in the liquids could be achieved with a high PL dose, which could be
314 obtained by reducing the sample depth and the lamp distance and by increasing the number of
315 the pulses. Maftai, Ramos-Villarroel, Nicolau, Martín-Belloso, and Soliva-Fortuny (2014)
316 found 3.76 log CFU/mL reductions of *Penicillium expansum* spores in clear apple juice having
317 8 mm depth after PL dose of 32 J/cm^2 . The higher inactivation rates achieved than this study
318 even if they exposed PL to mould spores in their study. This can be likely a consequence of the
319 high UV light penetration rate in the clarified apple juice with less turbidity and absorbance
320 values than freshly squeezed verjuice. Ferrario, Alzamora, and Guerrero (2013) observed that
321 the inactivation of *S. cerevisiae* in natural apple juice ($<1 \text{ log CFU/mL}$) was significantly lower
322 than in the clarified juice ($\sim 4 \text{ log CFU/mL}$) when applying a PL dose of 71.6 J/cm^2 . It was
323 stated that the light absorptivity depends on liquid properties, such as suspended particles, color
324 and TSS (Aguirre, Hierro, Fernandes, & de Fernando, 2014; Keyser et al., 2008). It was reported
325 that *S. cerevisiae* cells were highly resistant to UV-C wavelengths, due to their larger size and

different DNA structure compared to bacteria (Fredericks, du Toit, & Krugel, 2011; Tran & Farid, 2004). The PL resistivity of *S. cerevisiae* in this study could also be a result of using acid-adapted cells. These cells might have an altered protein expression and membrane lipid composition that could alleviate the PL effects on the DNA (Huang, Tsai, & Pan, 2007; Yuk & Marshall, 2004).

All MH and hurdle treatments (PLMH) based on depth of juice layer at different temperatures were demonstrated in Figure 2. Considering MH treatments, the maximum reduction of the acid-adapted *S. cerevisiae* cells (3.4 ± 0.44 log CFU/mL) was achieved at 47 °C for 8.5 min [MH47] (Figure 2c). In contrast, 2.28 ± 0.36 and 1.35 ± 0.29 log CFU/mL reductions were obtained after treating at 45 and 43 °C for 20 min [MH45 and MH43], respectively (Figure 2a & 2b). All MH inactivation curves showed upward concavity with a tailing phase. García Carrillo, Ferrario, and Guerrero (2018) observed the same trend for *S. cerevisiae* in a carrot-orange juice blend at 50 °C and suggested the tailing resulted from the presence of heat-resistant cells in the population. The high inactivation for mild heating at 47 °C was due to the lethal effect of heat on the yeast cells. Furthermore, it is known that a low pH value of the heating medium enhances microbial inactivation by decreasing the thermal resistance of microorganism (Smelt & Brul, 2014). Gouma, Gayán, Raso, Condón, and Álvarez (2015) observed ~0.2 and 0.5 log CFU/mL reduction of *S. cerevisiae* STCC 1172 in apple juice (pH: 3.6) after 3.5 min at 50 and 55 °C, respectively. Treatment of verjuice at 47 °C for 3.5 min resulted in a comparatively higher reduction (2.4 log CFU/mL) of acid-adapted *S. cerevisiae*. Similarly, 2.6 log CFU/mL reductions of *S. cerevisiae* (KE162) were achieved in carrot-orange juice blend (pH: 3.8, 9.8 °Brix) at 50 °C for 15 min (García Carrillo et al., 2018). In this study, a similar reduction (2.6 log) was attained for acid-adapted *S. cerevisiae* by heating verjuice at 45 and 47 °C for the same treatment time. Gabriel (2012) reported 1 log reduction in the number of *S. cerevisiae* cells (BFE-39) in apple juice (pH: 3.7, 12.5 °Brix) exposed to 55 °C for 6.2 min. A

justification for the relatively higher reduction of *S. cerevisiae* at lower MH temperatures or shorter time in the current study could be attributed to the lower acidic conditions (pH 2.6) and lower sugar content (3.7 °Brix) of verjuice. Shearer, Mazzotta, Chuyate, and Gombas, (2002) pointed out that the heat resistance of *S. cerevisiae* in various juices depends on the composition, as well as on pH. Several studies also state that the heat-resistant of yeast cells in juices increased with an increase in the soluble solids content (Beuchat, 1982; Juven, Kanner, & Weisslowicz, 1978; Torreggiani & Toledo, 1986).

The log reductions of acid-adapted *S. cerevisiae* in verjuice exposed to combined (PLMH) treatments are also shown in Figure 2. Juice layer depth and treatment temperature were influential factors in reducing *S. cerevisiae* in verjuice, with the best efficacy accomplished at low juice depths. For combined treatments, 1-mm layer conditions were discarded as they did not allow effectively controlling juice temperature increases. FDA pasteurization requirements were achieved in verjuice exposed to 50 pulses at 45 °C for 20 min [PLMH45-3] and to 18 pulses at 47 °C for 8.5 min [PLMH47-3] using a layer of 3 mm. As a result, 5.10 ± 0.24 log CFU/mL (17 J/cm^2) (Figure 2b) and 5.06 ± 0.08 log CFU/mL (6.12 J/cm^2) reductions (Figure 2c) were obtained, respectively. These results were not statistically different from each other ($p > 0.05$). Figure 2b & 2c shows that the inactivation of *S. cerevisiae* at 45 and 47 °C was significantly lower when the treatments were applied on a 5 mm-deep juice layer ($p \leq 0.05$). The maximal yeasts reduction (4.36 ± 0.25 log CFU/mL) was attained at 47 °C and 6.12 J/cm^2 [PLMH47-5]. In contrast, significantly lower reductions, i.e. 2.88 and 2.51 log CFU/mL, were achieved after PL treatments at 43 °C for 3 [PLMH43-3] and 5 mm [PLMH43-5] verjuice depths, respectively (Figure 2a). Synergism between PL and MH treatments at above 40 °C has already been reported on the inactivation of *L. innocua* in buffer solutions (Hilton et al., 2017) and *Botrytis cinerea* and *Monilia fructigena* in nutrient agar (Marquenie et al., 2003). Marquenie et al. (2003) reported that MH inactivation of *B. cinerea* required 10 min at 45 °C,

whereas only 3 min was needed when applying MH at 45 °C with 2 min of PL treatment. Thus, the combined treatment significantly decreased the exposure time compared to the individual treatments. As far as we are concerned, no information is yet available regarding the inactivation of yeasts in fruit juices by using combined pulsed light and MH treatments. However, the combined effect of continuous UV-C light (lethal wavelength region of PL) and MH on the inactivation of *S. cerevisiae* in fruit juices has been well documented (García Carrillo et al., 2018; Gouma et al., 2015). *S. cerevisiae* was reduced by 5 log after the treatment of apple juice at UV dose of 2.90 J/mL (2.7 min) and 57.5 °C (Gouma et al., 2015). Similarly, 4.7 log reduction of yeast was achieved in carrot-orange juice blend exposed to UV-C dose of 10 kJ/m² (15 min) at 50 °C (García Carrillo et al., 2018).

In conclusion, in the current study the application of 18 pulses for 8.5 min (6.12 J/cm²) to a juice layer of 3 mm at 47 °C (PLMH47-3) was selected as the best pasteurization conditions of verjuice, as the visual colour of the juice minimally changed under these conditions.

3.2. Effect of Pasteurization Treatments on the Quality Properties of Verjuice during storage

Physicochemical, antioxidant activity and optical properties of untreated (U), combined PL and mild heat (PLMH47-3) pasteurized and thermally pasteurized (P) verjuice right after treatment application is summarized in Table 4. All verjuice samples had similar pH values ($p>0.05$) (Table 4a). Likewise, Caminiti, Noci, Morgan, Cronin, and Lyng (2012) found no difference between the pH values of an orange-carrot juice blend after PL treatment (3.3 J/cm²) and pasteurization at 72 °C for 26 s, respectively. The TSS and TA of PLMH47-3 pasteurized verjuice were slightly higher than those values for untreated and thermally pasteurized verjuice ($p\leq0.05$) (Table 4a). This is consistent with the results published by Gerard and Roberts (2004), who reported an increase in the TSS of apple juice after heat treatment.

Treated verjuice samples (PLMH47-3 and P) were more turbid than the untreated one ($p \leq 0.05$). The increased turbidity of fruit juices has been linked to heat treatment (Gerard & Roberts, 2004; Kaya, Yildiz, & Unluturk, 2015; Rivas, Rodrigo, Martínez, Barbosa-Cánovas, & Rodrigo, 2006). Gerard & Roberts (2004) indicated that the increased cloudiness of juice could arise from the interactions of haze-active proteins and haze-active polyphenols, which increase suspended particles in the juice.

Absorption coefficient was statistically higher for PLMH-treated juice than for untreated and thermally pasteurized verjuice (U, P) depending on the juice cloudiness and color. Müller, Noack, Greiner, Stahl, and Posten (2014) detected an increase in the absorption coefficients of both apple and grape juices after UV-C and UV-B irradiation, which was consistent with the color change of the juices.

PLMH47-3-treated verjuice samples were not statistically different from untreated and thermally pasteurized ones regarding their antioxidant activity (Table 4a). Likewise, earlier studies did not find a significant alteration in the antioxidant capacity of orange-carrot juice blend after PL treatment (Caminiti et al., 2012) and pomegranate and grape juices after PL and heat treatments (Pala & Toklucu, 2011, 2013a).

According to Table 4b, PLMH47-3-pasteurized verjuice exhibited lower L^* , and higher a^* and b^* values compared to untreated and thermally pasteurized juices, possibly because PLMH at 47 °C induced browning of the juice. Aguilar, Ibarz, Garvín, and Ibarz (2016) detected the browning of nectarine juice treated after UV-C irradiation at 45 °C. Bhat & Stamminger (2015) reported an increase of a^* values could be due to the formation of melanoidin pigments in the juice. Also, Müller et al. (2014) determined the browning of apple and grape juices after UV-C irradiation, and stated that browning reactions in juice could occur as a result of the oxidation of phenolic compounds during the UV-C process. C^* values suggest a slight color saturation after the combined PLMH47-3 pasteurization. A similar increase of saturation in

UV-C irradiated pineapple juice was reported by Chia, Rosnah, Noranizan, and WD (2012). Yellowness was similar among samples ($p>0.05$). Considering CIE color parameters, the BI of PLMH47-3-pasteurized verjuice was slightly greater than other treated and untreated samples (Table 4b). Total color difference of PLMH47-3-pasteurized (ΔE : 1.54), and thermally pasteurized (ΔE : 0.69) verjuice were “slightly noticeable” according to the color classification given by Cserhalmi, Sass-Kiss, Tóth-Markus, and Lechner (2006). Kwaw, Ma, et al. (2018) also observed slightly noticeable color change after thermal and PL pasteurization of mulberry juice. They reported that these changes could result from the effect of heating and photochemical degradation reactions occurred in thermal and PL treatments.

The acceptable maximum total aerobic mesophilic bacteria count (TMAC), and yeast and mould count (YMC) in fruit juices are required to be 4 and 3 log CFU/mL, respectively (IFST, 1999; Turkish Food Codex, 2002). Based on this criteria, it was found that untreated verjuice were completely spoiled at 25 °C within 2 weeks (3.70 ± 0.80 log CFU/mL). However, no growth was detected in verjuice samples treated with PL assisted with mild heat (PLMH47-3) or in heat pasteurized during 6 weeks of storage at room temperature. Considering refrigerated verjuice samples, microbial growth was not observed in any sample throughout 6 weeks of storage. Ferrario and Guerrero (2016) reported an increase of 2 log in YMC of untreated apple juice after 6 days of storage at 5 °C whereas no change occurred in juices treated with a combination of PL and ultrasounds. Similarly, the number of *S. cerevisiae* increased by ~1.5 log in untreated apple juice after 7 days at 5 °C, but no growth was detected in PL-treated juice (71.6 J/cm^2) (Ferrario et al., 2015). Koh et al. (2016) were able to extend the shelf-life of cantaloupe fruit from 8 days to 28 days at 5°C by applying repetitive PL (0.9 J/cm^2) to the fruit every 2 days. Various fruit juices could be extended by applying UV-C light under refrigerated conditions (Kaya et al., 2015; Pala & Toklucu, 2013b; Tran & Farid, 2004; Unluturk & Atilgan, 2015). Consequently, verjuice pasteurized with combined PLMH47-3 treatment was

microbiologically safe after 6 weeks of storage under refrigerated (5°C) and room temperature (25°C) storage conditions.

pH, TSS, TA and antioxidant activity of the juice samples did not dramatically change over 6 weeks of storage at both temperatures.(Figure 3a, 3b, 3c, 3f). TA was constant until week 4 and then began to increase slightly at week 6. Koh et al. (2016) documented no change in pH, TSS and TA of PL-treated cantaloupe during 28 days storage at 4 °C. Salinas-Roca, Soliva-Fortuny, Welti-Chanes, and Martín-Belloso (2016) found a slight change in pH and TSS of PL-treated fresh-cut mango during 14 days of storage at 4 °C. Elsewhere, these physicochemical values were generally unchanged during the shelf-life of fruit juices treated with PL and its combined technologies (La Cava & Sgroppo, 2015; Riganakos, Karabagias, Gertzou, & Stahl, 2017; Tandon, Worobo, Churey, & Padilla-Zakour, 2003).

Turbidity did not change during the first 2 weeks of storage at both temperatures. Then cloudiness of refrigerated juice samples significantly increased regardless the treatment applied until the end of the storage period ($p \leq 0.05$) (Figure 3d). This might be related to the formation of tartrate crystals at cold conditions due to the inefficient detartarisation step (Andrés, Riera, & Alvarez, 1997). The increase in the cloudiness of untreated verjuice after 2 weeks at 25°C could be explained by the growth of the moulds within the juice (Figure 3d). Furthermore, the increase in cloudiness of treated verjuice samples at 25 °C could be attributed to the formation of complexes between proteins and phenolic compounds in the juice composition (Lee, Yusof, Hamid, & Baharin, 2007). Additionally, the increment of turbidity in fruit juices could be explained by the inadequate inactivation of pectin methyl esterase enzyme, which is responsible for juice cloudiness (Rivas et al., 2006).

The absorption coefficient of verjuice samples stored at both temperatures exhibited different trends during storage (Figure 3e). The absorption coefficient dramatically increased from 41.61 to 48.73 cm⁻¹, and from 36.62 to 44.47 cm⁻¹ in the PLMH47-3-treated and P-treated

juices, respectively over 6 weeks of storage at 25 °C. Guerrero-Beltrán and Barbosa-Cánovas (2004) indicated that the high cloudiness of fruit juice could result in a higher absorption coefficient and reduced light transmittance. The increase of absorbance in fruit juices during storage could result from the decomposition of colored compounds and the formation of dark-colored pigments (melanin and melanoidins) due to browning reactions (Müller et al., 2014; Unluturk & Atilgan, 2015). The absorption properties of melanin pigment and its effect on UV-C light irradiation was reported in literature (Seiji & Iwashita, 1965).

All untreated and pasteurized verjuice samples showed high antioxidant activity (AA) (Figure 3f). The AA of untreated, PLMH47-3 and thermally pasteurized verjuice were 91.50, 92.18 and 90.11% at the beginning and did not markedly decrease at both storage temperatures. After 6 weeks, the AA of the untreated refrigerated juice was 91.06% while PLMH47-3-treated and thermally pasteurized verjuice exhibited 91.17 and 92.50% inhibition when refrigerated and 91.28 and 91.45% inhibition when stored at room temperature. Oms-Oliu, Odriozola-Serrano, and Martín-Belloso (2012) stated that UV-C light could change the AA of fresh plant products, depending on the dose, time and type of fruit. Kwaw, Tchabo, et al. (2018) observed a slight decrease of AA of lactic acid fermented mulberry juice processed by PL assisted with and ultrasonic treatment, attributing to the degradation of phenolic contents. Additionally, the AA of the mulberry juice was better preserved in cold storage conditions. Koh et al. (2016) detected no change in the phenolic content of PL-treated cantaloupe during storage. Therefore, the unchanged AA may be associated to the stability of phenolic contents due to the high acidic conditions of verjuice (Kwaw, Tchabo, et al., 2018). Some studies report an increased AA in PL- or UV-C-treated fruit products during shelf-life by directly correlating their phenolic contents (González-Aguilar, Villegas-Ochoa, Martínez-Téllez, Gardea, & Ayala-Zavala, 2007; Oms-Oliu, Aguiló-Aguayo, Martín-Belloso, & Soliva-Fortuny, 2010; Pataro et al., 2015).

Lightness or L^* value of all samples were almost the same through 6 weeks of refrigerated storage, whereas it slightly changed after 2 weeks at 25 °C (Figure 4a). The most important variation occurred in a^* values, all samples became significantly redder, particularly when stored at 25 °C. Under cold storage conditions, a^* value of PLMH-treated juice increased by 2.84-fold, while it increased by 9-fold in untreated and by 7.5-fold in heat-treated verjuice (Figure 4b). The increased a^* value in verjuice could be due to the chlorophyll degradation or generation of brown melanoidin pigments during storage (Bhat & Stamminger, 2015). The combined treatment (PLMH47-3) maintained the green pigmentation in verjuice much better compared to the controls (U, P) under either storage conditions. Yellowness (b^*) did not remarkably change at refrigerated temperature, whereas it markedly increased at 25 °C after the first week, and fluctuated until the end of storage period (Figure 4c). The chroma (C^*) change in all verjuice samples was much more noticeable at 25 °C (Figure 4d). The hue angle of verjuice was around the yellow region (h° : 90°), which is in accordance to Pathare, Opara, and Al-Said (2013). It decreased by 8-9% in PLMH-treated verjuice after 6 weeks at both storage temperatures. However, it significantly decreased by 16% in the positive control (P) at 25 °C (Figure 4e). No significant change in yellowness of the PLMH47-3-treated verjuice was observed. The total color change (ΔE) values for verjuice samples over 6 weeks of refrigerated storage were 1.24 (U), 0.79 (PLMH47-3) and 0.94 (P), which may be considered to be a slightly noticeable (0.5-1.5) change based on the classification given by Cserhalmi et al. (2006) (Figure 4f). In contrast, the color change in verjuice samples stored at 25°C was slightly higher and can be classified as noticeable (1.5-3.0). Browning index (BI) showed that color of verjuice samples was better maintained when stored under refrigerated conditions (Figure 4g). By the end of the storage period, thermally pasteurized juice was 1.24-fold darker than the juice treated with PLMH47-3. These results are in accordance with literature. Ferrario and Guerrero (2016) reported no change in the L^* and b^* values of natural apple juice after PL treatment (0.73 J/cm²)

during 12 days of cold storage. Koh et al. (2016) did not observe any change in L^* , C^* and h° of repetitive PL-treated fresh-cut cantaloupe fruit during 28 days of storage at 4 °C. Salinas-Roca et al. (2016) also did not find a remarkable change in the L^* and h° of PL-treated mango slices after 14 days at 4 °C. PL treatment has been reported to promote the formation of undesirable dark-colored melanoidin pigments through the interaction between phenolic compounds and oxidative enzymes (Ferrario & Guerrero, 2016). In this study, limited browning occurred in the PLMH47-3 pasteurized verjuice stored at refrigerated conditions, due to the restricted enzyme activity at cold storage and the highly acidic conditions of the juice.

4. CONCLUSIONS

Verjuice was successfully pasteurized by applying a combination of pulsed light and mild heat. Selected treatment conditions (6.12 J/cm² applied to a 3-mm juice layer. together with heating to 47 °C for 8.5 min) allowed achieving 5-log reductions for *S. cerevisiae* and a significant shelf-life extension, up to 6 weeks, even under room temperature storage conditions. Although the physicochemical properties of the pasteurized verjuice did not markedly change, the optical properties slightly changed during shelf-life.

In conclusion, the combination of PL and MH treatments allows meeting the FDA requirements for pasteurization of verjuice, thus extending the shelf-life while minimizing quality losses. This study reveals that PL technology can be an effective method for the pasteurization of acidic clear fruit juices, provided that an appropriate equipment can be designed by considering optimal process parameters.

Acknowledgements

This study was financially supported by the Scientific and Technological Research Council of Turkey (TUBITAK) 2214-A International Doctoral Research Fellowship Programme. All experiments were performed in the laboratories of the Novel Technologies for

Food Processing Research Group, Department of Food Technology, University of Lleida (UDL), Spain. The authors declare that there are no conflicts of interest related to this article.

REFERENCES

- Aguilar, K., Ibarz, R., Garvín, A., & Ibarz, A. (2016). Effect of UV-Vis irradiation on enzymatic activities and the physicochemical properties of nectarine juices from different varieties. *LWT - Food Science and Technology*, 65, 969–977. <https://doi.org/10.1016/j.lwt.2015.09.006>
- Aguirre, J., Hierro, E., Fernandes, M., & de Fernando, G. (2014). Aguirre (2014) Modelling the effect of light penetration and matrix colour on the inactivation of *L. innocua* by PL. *Innovative Food Science and Emerging Technologies*, 26, 505–510.
- Aminian, A., Aminian, B., Nekooian, A. A., & Hoseinali, F. (2006). Effect of unripe grape juice (verjuice) on plasma lipid levels in rabbits rendered hypercholesterolemic by feeding egg yolk. *Acta Medica Iranica*, 44(4), 230–234.
- Aminian, B., Massoompour, S., Sadeg, A. A., & Omrani, G. H. (2003). *Unripe grape juice (verjuice) as a lipid-lowering agent: fact of fiction. Archives of Iranian Medicine* (Vol. 6). Retrieved from <http://www.ams.ac.ir/AIM/NEWPUB/13/16/8/AIM/0261/0261032.pdf>
- Andrés, L. J., Riera, F. A., & Alvarez, R. (1997). Recovery and concentration by electrodialysis of tartaric acid from fruit juice industries waste waters. *Journal of Chemical Technology and Biotechnology*, 70(3), 247–252. [https://doi.org/10.1002/\(SICI\)1097-4660\(199711\)70:3<247::AID-JCTB763>3.0.CO;2-8](https://doi.org/10.1002/(SICI)1097-4660(199711)70:3<247::AID-JCTB763>3.0.CO;2-8)
- Aneja, K. R., Dhiman, R., Aggarwal, N. K., Kumar, V., & Kaur, M. (2014). Microbes associated with freshly prepared juices of citrus and carrots. *International Journal of Food Science*, 2014. <https://doi.org/10.1155/2014/408085>
- Artíguez, M. L., Lasagabaster, A., & Marañón, I. M. de. (2011). Factors affecting microbial

576 inactivation by Pulsed Light in a continuous flow-through unit for liquid products
 577 treatment. *Procedia Food Science*, 1(December 2011), 786–791.
 578 <https://doi.org/10.1016/j.profoo.2011.09.119>

579 Barbosa-Cánovas, G. V., Pothakamury, U. R., Palou, E., & Swanson, B. G. (1998). *Nonthermal*
 580 *preservation of foods*. Marcel Dekker.

581 Beuchat, L. R. (1982). Thermal Inactivation of Yeasts in Fruit Juices Supplemented with Food
 582 Preservatives and Sucrose. *Journal of Food Science*, 47(5), 1679–1682.
 583 <https://doi.org/10.1111/j.1365-2621.1982.tb05010.x>

584 Bhat, R., & Stamminger, R. (2015). Impact of ultraviolet radiation treatments on the
 585 physicochemical properties, antioxidants, enzyme activity and microbial load in freshly
 586 prepared hand pressed strawberry juice. *Food Science and Technology International*,
 587 21(5), 354–363. <https://doi.org/10.1177/1082013214536708>

588 Caminiti, I. M., Noci, F., Morgan, D. J., Cronin, D. A., & Lyng, J. G. (2012). The effect of
 589 pulsed electric fields, ultraviolet light or high intensity light pulses in combination with
 590 manothermosonication on selected physico-chemical and sensory attributes of an orange
 591 and carrot juice blend. *Food and Bioprocess Processing*, 90(3), 442–448.
 592 <https://doi.org/10.1016/j.fbp.2011.11.006>

593 Chia, S., Rosnah, S., Noranizan, M., & WD, W. (2012). The effect of storage on the quality
 594 attributes of ultraviolet-irradiated and thermally pasteurised pineapple juices.
 595 *International Food Research Journal*, 19(3), 1001–1010. Retrieved from
 596 <http://agris.upm.edu.my:8080/dspace/handle/0/12748>

597 Cserhalmi, Z., Sass-Kiss, Á., Tóth-Markus, M., & Lechner, N. (2006). Study of pulsed electric
 598 field treated citrus juices. *Innovative Food Science and Emerging Technologies*, 7(1–2),
 599 49–54. <https://doi.org/10.1016/j.ifset.2005.07.001>

600 Ferrario, M., Alzamora, S., & Guerrero, S. (2013). Inactivation kinetics of some

- microorganisms in apple, melon, orange and strawberry juices by high intensity light pulses. *Journal of Food Engineering*, 118(3), 302–311. Retrieved from <https://www.sciencedirect.com/science/article/pii/S0260877413001714>
- Ferrario, M., Alzamora, S. M., & Guerrero, S. (2015). Study of the inactivation of spoilage microorganisms in apple juice by pulse light and ultrasound. *Food Microbiology*, 46, 635–642.
- Ferrario, M., & Guerrero, S. (2016). Effect of a continuous flow-through pulsed light system combined with ultrasound on microbial survivability, color and sensory shelf life of apple juice. *Innovative Food Science and Emerging Technologies*, 34, 214–224. <https://doi.org/10.1016/j.ifset.2016.02.002>
- Fredericks, I., du Toit, M., & Krugel, M. (2011). Efficacy of ultraviolet radiation as an alternative technology to inactivate microorganisms in grape juices and wines. *Food Microbiology*, 28(3), 510–517. Retrieved from <https://www.sciencedirect.com/science/article/pii/S0740002010002819>
- Gabriel, A. A. (2012). Inactivation of Escherichia coli O157:H7 and spoilage yeasts in germicidal UV-C-irradiated and heat-treated clear apple juice. *Food Control*, 25(2), 425–432. <https://doi.org/10.1016/j.foodcont.2011.11.011>
- Ganan, M., Hierro, E., Hospital, X. F., Barroso, E., & Fernández, M. (2013). Use of pulsed light to increase the safety of ready-to-eat cured meat products. *Food Control*, 32(2), 512–517. <https://doi.org/10.1016/j.foodcont.2013.01.022>
- García Carrillo, M., Ferrario, M., & Guerrero, S. (2018). Effectiveness of UV-C light assisted by mild heat on *Saccharomyces cerevisiae* KE 162 inactivation in carrot-orange juice blend studied by flow cytometry and transmission electron microscopy. *Food Microbiology*, 73, 1–10. <https://doi.org/10.1016/j.fm.2017.12.012>
- Gerard, K. A., & Roberts, J. S. (2004). Microwave heating of apple mash to improve juice yield

626 and quality. *LWT - Food Science and Technology*, 37(5), 551–557.
 627 <https://doi.org/10.1016/j.lwt.2003.12.006>

628 Gómez-López, V. M., Devlieghere, F., Bonduelle, V., & Debevere, J. (2005). Intense light
 629 pulses decontamination of minimally processed vegetables and their shelf-life.
 630 *International Journal of Food Microbiology*, 103(1), 79–89.
 631 <https://doi.org/10.1016/j.ijfoodmicro.2004.11.028>

632 Gómez-López, V. M., Ragaert, P., Debevere, J., & Devlieghere, F. (2007). Pulsed light for food
 633 decontamination: a review. *Trends in Food Science and Technology*.
 634 <https://doi.org/10.1016/j.tifs.2007.03.010>

635 Gómez, P. L., Welte-Chanes, J., & Alzamora, S. M. (2011). Hurdle Technology in Fruit
 636 Processing. *Annual Review of Food Science and Technology*, 2(1), 447–465.
 637 <https://doi.org/10.1146/annurev-food-022510-133619>

638 González-Aguilar, G. A., Villegas-Ochoa, M. A., Martínez-Téllez, M. A., Gardea, A. A., &
 639 Ayala-Zavala, J. F. (2007). Improving antioxidant capacity of fresh-cut mangoes treated
 640 with UV-C. *Journal of Food Science*, 72(3), 197–202. [https://doi.org/10.1111/j.1750-](https://doi.org/10.1111/j.1750-3841.2007.00295.x)
 641 [3841.2007.00295.x](https://doi.org/10.1111/j.1750-3841.2007.00295.x)

642 Gouma, M., Gayán, E., Raso, J., Condón, S., & Álvarez, I. (2015). Inactivation of spoilage
 643 yeasts in apple juice by UV-C light and in combination with mild heat. *Innovative Food*
 644 *Science and Emerging Technologies*, 32, 146–155.
 645 <https://doi.org/10.1016/j.ifset.2015.09.008>

646 Guerrero-Beltrán, J. A., & Barbosa-Cánovas, G. V. (2004). Review: Advantages and limitations
 647 on processing foods by UV light. *Food Science and Technology International*, 10(3), 137–
 648 147. <https://doi.org/10.1177/1082013204044359>

649 Hayoglu, I., Kola, O., Kaya, C., Özer, S., & Turkoglu, H. (2009). Chemical and sensory
 650 properties of verjuice, a traditional turkish non-fermented beverage from kabarcik and

651 yediveren grapes. *Journal of Food Processing and Preservation*, 33(SUPPL. 1), 252–263.
 652 <https://doi.org/10.1111/j.1745-4549.2008.00339.x>

653 Hilton, S. T., de Moraes, J. O., & Moraru, C. I. (2017). Effect of sublethal temperatures on
 654 pulsed light inactivation of bacteria. *Innovative Food Science and Emerging Technologies*.
 655 <https://doi.org/10.1016/j.ifset.2016.11.002>

656 Huang, Y.-J., Tsai, T.-Y., & Pan, T.-M. (2007). Physiological Response and Protein Expression
 657 under Acid Stress of Escherichia coli O157:H7 TWC01 Isolated from Taiwan. *Journal of*
 658 *Agricultural and Food Chemistry*, 55, 7182–7191. <https://doi.org/10.1021/jf071014s>

659 IFST. (1999). *Development and use of microbiological criteria for foods*. London: Institute of
 660 Food Science and Technology (UK).

661 Juven, B. J., Kanner, J., & Weisslowicz, H. (1978). Influence of Orange Juice Composition on
 662 the thermal resistance of spoilage yeasts. *Journal of Food Science*, 43(4), 1074–1080.
 663 <https://doi.org/10.1111/j.1365-2621.1978.tb15236.x>

664 Karapinar, M., & Sengun, I. Y. (2007). Antimicrobial effect of koruk (unripe grape-Vitis
 665 vinifera) juice against Salmonella typhimurium on salad vegetables. *Food Control*, 18(6),
 666 702–706. <https://doi.org/10.1016/j.foodcont.2006.03.004>

667 Kaya, Z., Yildiz, S., & Unluturk, S. (2015). Effect of UV-C irradiation and heat treatment on
 668 the shelf life stability of a lemon-melon juice blend: Multivariate statistical approach.
 669 *Innovative Food Science and Emerging Technologies*, 29.
 670 <https://doi.org/10.1016/j.ifset.2015.03.005>

671 Keyser, M., Muller, I. A., Cilliers, F. P., Nel, W., & Gouws, P. A. (2008). Ultraviolet radiation
 672 as a non-thermal treatment for the inactivation of microorganisms in fruit juice. *Innovative*
 673 *Food Science and Emerging Technologies*, 9(3), 348–354.
 674 <https://doi.org/10.1016/j.ifset.2007.09.002>

675 Koh, P. C., Noranizan, M. A., Karim, R., & Nur Hanani, Z. A. (2016). Repetitive pulsed light

676 treatment at certain interval on fresh-cut cantaloupe (*Cucumis melo* L. *reticulatus* cv.
677 Glamour). *Innovative Food Science & Emerging Technologies*, 36, 92–103.
678 <https://doi.org/10.1016/J.IFSET.2016.05.015>

679 Koutchma, T. N. (2008). UV Light for Processing Foods. *Ozone: Science and Engineering*,
680 31(1), 93–98.

681 Krishnamurthy, K., Demirci, A., & Irudayaraj, J. M. (2007). Inactivation of *Staphylococcus*
682 aureus in milk using flow-through pulsed UV-light treatment system. *Journal of Food*
683 *Science*, 72(7). <https://doi.org/10.1111/j.1750-3841.2007.00438.x>

684 Kwaw, E., Ma, Y., Tchabo, W., Apaliya, M. T., Sackey, A. S., Wu, M., & Xiao, L. (2018).
685 Effect of pulsed light treatment on the phytochemical, volatile, and sensorial attributes of
686 lactic-acid-fermented mulberry juice. *International Journal of Food Properties*, 21(1),
687 213–228. <https://doi.org/10.1080/10942912.2018.1446024>

688 Kwaw, E., Tchabo, W., Ma, Y., Apaliya, M. T., Sackey, A. S., Mintah, B. K., ... Ma, S. (2018).
689 Effect of storage on quality attributes of lactic-acid-fermented mulberry juice subjected to
690 combined pulsed light and ultrasonic pasteurization treatment. *Journal of Food*
691 *Measurement and Characterization*, 12(3), 1763–1771. [https://doi.org/10.1007/s11694-](https://doi.org/10.1007/s11694-018-9791-7)
692 018-9791-7

693 La Cava, E. L. M., & Sgroppo, S. C. (2015). Evolution during refrigerated storage of bioactive
694 compounds and quality characteristics of grapefruit [*Citrus paradisi* (Macf.)] juice treated
695 with UV-C light. *LWT - Food Science and Technology*, 63(2), 1325–1333.
696 <https://doi.org/10.1016/j.lwt.2015.04.013>

697 Lee, W. C., Yusof, S., Hamid, N. S. A., & Baharin, B. S. (2007). Effects of fining treatment
698 and storage temperature on the quality of clarified banana juice. *LWT - Food Science and*
699 *Technology*, 40(10), 1755–1764. <https://doi.org/10.1016/j.lwt.2006.12.008>

700 Maftai, N., Ramos-Villarroel, A., Nicolau, A., Martin-Belloso, O., & Soliva-Fortuny, R.

(2014). Influence of processing parameters on the pulsed-light inactivation of *Penicillium expansum* in apple juice. *Food Control*, 41, 27–31. Retrieved from <https://www.sciencedirect.com/science/article/pii/S0956713513006646>

Marquenie, D., Geeraerd, A. H., Lammertyn, J., Soontjens, C., Van Impe, J. F., Michiels, C. W., & Nicolai, B. M. (2003). Combinations of pulsed white light and UV-C or mild heat treatment to inactivate conidia of *Botrytis cinerea* and *Monilia fructigena*. *International Journal of Food Microbiology*, 85(1–2), 185–196. [https://doi.org/10.1016/S0168-1605\(02\)00538-X](https://doi.org/10.1016/S0168-1605(02)00538-X)

Miller, F. A., & Silva, C. L. M. (2012). Advances in Fruit Processing Technologies. In S. Rodrigues & F. A. N. Fernandes (Eds.), *Advances in Fruit Processing Technologies* (pp. 363–386). CRC Press.

Müller, A., Noack, L., Greiner, R., Stahl, M. R., & Posten, C. (2014). Effect of UV-C and UV-B treatment on polyphenol oxidase activity and shelf life of apple and grape juices. *Innovative Food Science and Emerging Technologies*, 26, 498–504. <https://doi.org/10.1016/j.ifset.2014.05.014>

Muñoz, A., Palgan, I., Noci, F., Morgan, D. J., Cronin, D. A., Whyte, P., & Lyng, J. G. (2011). Combinations of High Intensity Light Pulses and Thermosonication for the inactivation of *Escherichia coli* in orange juice. *Food Microbiology*, 28, 1200–1204. <https://doi.org/10.1016/j.fm.2011.04.005>

NACMCF. (2006). National Advisory Committee on Microbiological Criteria for Foods. Requisite scientific parameters for establishing the equivalence of alternative methods of pasteurization. *Journal of Food Protection*, 69(5), 1190–1216. <https://doi.org/10.4315/0362-028X-69.5.1190>

Oms-Oliu, G., Aguiló-Aguayo, I., Martín-Belloso, O., & Soliva-Fortuny, R. (2010). Effects of pulsed light treatments on quality and antioxidant properties of fresh-cut mushrooms

726 (Agaricus bisporus). *Postharvest Biology and Technology*, 56(3), 216–222.
 727 <https://doi.org/10.1016/J.POSTHARVBIO.2009.12.011>

728 Oms-Oliu, G., Martín-Belloso, O., & Soliva-Fortuny, R. (2010). Pulsed light treatments for
 729 food preservation. A review. *Food and Bioprocess Technology*.
 730 <https://doi.org/10.1007/s11947-008-0147-x>

731 Oms-Oliu, G., Odriozola-Serrano, I., & Martin-Belloso, O. (2012). The Effects of Non-Thermal
 732 Technologies on Phytochemicals. In *Phytochemicals-A Global Perspective of Their Role*
 733 *in Nutrition and Health*. InTech.

734 Oncul, N., & Karabiyikli, S. (2015). Factors Affecting the Quality Attributes of Unripe Grape
 735 Functional Food Products. *Journal of Food Biochemistry*, 39(6), 689–695.
 736 <https://doi.org/10.1111/jfbc.12175>

737 Pala, C., & Toklucu, A. (2011). Effect of UV-C light on anthocyanin content and other quality
 738 parameters of pomegranate juice. *Journal of Food Composition and Analysis*, 24(6), 790–
 739 795. <https://doi.org/10.1016/j.jfca.2011.01.003>

740 Pala, C., & Toklucu, A. (2013a). Effects of UV-C Light Processing on Some Quality
 741 Characteristics of Grape Juices. *Food and Bioprocess Technology*, 6(3), 719–725.
 742 <https://doi.org/10.1007/s11947-012-0808-7>

743 Pala, C., & Toklucu, A. (2013b). Microbial, physicochemical and sensory properties of UV-C
 744 processed orange juice and its microbial stability during refrigerated storage. *LWT - Food*
 745 *Science and Technology*, 50(2), 426–431. <https://doi.org/10.1016/j.lwt.2012.09.001>

746 Palomo, E. S., Díaz-Maroto, M. C., Viñas, M. A. G., Soriano-Pérez, A., & Pérez-Coello, M. S.
 747 (2007). Aroma profile of wines from Albillo and Muscat grape varieties at different stages
 748 of ripening. *Food Control*, 18(5), 398–403.
 749 <https://doi.org/10.1016/j.foodcont.2005.11.006>

750 Pataro, G., Sinik, M., Capitoli, M. M., Donsì, G., & Ferrari, G. (2015). The influence of post-

751 harvest UV-C and pulsed light treatments on quality and antioxidant properties of tomato
 752 fruits during storage. *Innovative Food Science and Emerging Technologies*.
 753 <https://doi.org/10.1016/j.ifset.2015.06.003>

754 Pathare, P. B., Opara, U. L., & Al-Said, F. A. J. (2013). Colour Measurement and Analysis in
 755 Fresh and Processed Foods: A Review. *Food and Bioprocess Technology*, 6(1), 36–60.
 756 <https://doi.org/10.1007/s11947-012-0867-9>

757 Raso, J., & Barbosa-Cánovas, G. V. (2003). Nonthermal Preservation of Foods Using
 758 Combined Processing Techniques. *Critical Reviews in Food Science and Nutrition*, 43(3),
 759 265–285. <https://doi.org/10.1080/10408690390826527>

760 Riganakos, K. A., Karabagias, I. K., Gertzou, I., & Stahl, M. (2017). Comparison of UV-C and
 761 thermal treatments for the preservation of carrot juice. *Innovative Food Science and*
 762 *Emerging Technologies*, 42(April), 165–172. <https://doi.org/10.1016/j.ifset.2017.06.015>

763 Rivas, A., Rodrigo, D., Martínez, A., Barbosa-Cánovas, G. V., & Rodrigo, M. (2006). Effect
 764 of PEF and heat pasteurization on the physical-chemical characteristics of blended orange
 765 and carrot juice. *LWT - Food Science and Technology*, 39(10), 1163–1170.
 766 <https://doi.org/10.1016/j.lwt.2005.07.002>

767 Said, N. E. Ben, Federighi, M., Bakhrouf, A., & Orange, N. (2010). Effectiveness of Pulsed
 768 Ultraviolet-Light Treatment for Bacterial Inactivation on Agar Surface and Liquid
 769 Medium. *Foodborne Pathogens and Disease*, 7(11), 1401–1406.
 770 <https://doi.org/10.1089/fpd.2010.0594>

771 Salinas-Roca, B., Soliva-Fortuny, R., Welti-Chanes, J., & Martín-Belloso, O. (2016).
 772 Combined effect of pulsed light, edible coating and malic acid dipping to improve fresh-
 773 cut mango safety and quality. *Food Control*, 66, 190–197.
 774 <https://doi.org/10.1016/j.foodcont.2016.02.005>

775 Sauer, A., & Moraru, C. I. (2009). Inactivation of Escherichia coli ATCC 25922 and

776 Escherichia coli O157:H7 in Apple Juice and Apple Cider, Using Pulsed Light Treatment.
777 *Journal of Food Protection*, 72(5), 937–944. <https://doi.org/10.4315/0362-028X-72.5.937>

778 Seiji, M., & Iwashita, S. (1965). Enzyme inactivation by ultraviolet light and protective effect
779 of melanin. *Journal of Biochemistry*, 57(3), 457–459.
780 <https://doi.org/10.1093/oxfordjournals.jbchem.a128102>

781 Setorki, M., Asgary, S., Eidi, A., & Haeri Rohani, A. (2010). Effects of acute verjuice
782 consumption with a high-cholesterol diet on some biochemical risk factors of
783 atherosclerosis in rabbits. *Med Sci Monit*, 16(4), BR124-130.
784 <https://doi.org/10.1186/1476-511X-9-10>

785 Shearer, A. E. H., Mazzotta, A. S., Chuyate, R., & Gombas, D. E. (2002). Heat resistance of
786 juice spoilage microorganisms. *Journal of Food Protection*, 65(8), 1271–1275.
787 <https://doi.org/10.4315/0362-028X-65.8.1271>

788 Sizer, C. E., & Balasubramaniam, V. M. (1999). New intervention processes for minially
789 processed juices. *Food Technology*. Retrieved from [http://agris.fao.org/agris-](http://agris.fao.org/agris-search/search.do?recordID=US2000003312)
790 [search/search.do?recordID=US2000003312](http://agris.fao.org/agris-search/search.do?recordID=US2000003312)

791 Smelt, J. P. P. M., & Brul, S. (2014). Thermal Inactivation of Microorganisms. *Critical Reviews*
792 *in Food Science and Nutrition*, 54(10), 1371–1385.
793 <https://doi.org/10.1080/10408398.2011.637645>

794 Tandon, K., Worobo, R. W., Churey, J. J., & Padilla-Zakour, O. I. (2003). Storage quality of
795 pasteurized and UV treated apple cider. *Journal of Food Processing and Preservation*,
796 27(1), 21–35. <https://doi.org/10.1111/j.1745-4549.2003.tb00498.x>

797 Tiwari, B. K., O'Donnell, C. P., & Cullen, P. J. (2009). Effect of non thermal processing
798 technologies on the anthocyanin content of fruit juices. *Trends in Food Science and*
799 *Technology*, 20(3–4), 137–145. <https://doi.org/10.1016/j.tifs.2009.01.058>

800 Torreggiani, D., & Toledo, R. T. (1986). Influence of Sugars on Heat Inactivation, Injury and

801 Repair of *Saccharomyces cerevisiae*. *Journal of Food Science*, 51(1), 211–215.
802 <https://doi.org/10.1111/j.1365-2621.1986.tb10872.x>

803 Tran, M. T. T., & Farid, M. (2004). Ultraviolet treatment of orange juice. *Innovative Food*
804 *Science and Emerging Technologies*, 5(4), 495–502.
805 <https://doi.org/10.1016/j.ifset.2004.08.002>

806 Turkish Food Codex. (2002). *Microbiologic Criteria Announcement of Turkish Food Codex*.
807 No:2001/-19. Ankara: Official Gazette.

808 U.S. FDA. (1996). *CFR - Code of Federal Regulations Title: 21CFR179.41*. New Hampshire
809 Avenue: U.S. Food and Drug Administration. Retrieved from
810 <https://www.accessdata.fda.gov/scripts/cdrh/cfdocs/cfcfr/cfrsearch.cfm>

811 U.S. FDA. (2001). Hazard Analysis and Critical Control Point (HACCP); Procedures for the
812 Safe and Sanitary Processing and Importing of Juice (pp. 6137–6202). Washington DC:
813 Federal Register.

814 Unluturk, S., & Atilgan, M. R. (2015). Microbial Safety and Shelf Life of UV-C Treated Freshly
815 Squeezed White Grape Juice. *Journal of Food Science*, 80(8), M1831–M1841.
816 <https://doi.org/10.1111/1750-3841.12952>

817 Vervoort, L., Van Der Plancken, I., Grauwet, T., Timmermans, R. A. H., Mastwijk, H. C.,
818 Matser, A. M., ... Van Loey, A. (2011). Comparing equivalent thermal, high pressure and
819 pulsed electric field processes for mild pasteurization of orange juice: Part II: Impact on
820 specific chemical and biochemical quality parameters. *Innovative Food Science and*
821 *Emerging Technologies*, 12(4), 466–477. <https://doi.org/10.1016/j.ifset.2011.06.003>

822 Wang, Y., Guo, X., Ma, Y., Zhao, X., & Zhang, C. (2018). Effect of ultrahigh temperature
823 treatment on qualities of watermelon juice. *Food Science and Nutrition*, 6(3), 594–601.
824 <https://doi.org/10.1002/fsn3.593>

825 Yuk, H. G., & Marshall, D. L. (2004). Adaptation of *Escherichia coli* O157:H7 to pH alters

826 membrane lipid composition, verotoxin secretion, and resistance to simulated gastric fluid
827 acid. *Applied and Environmental Microbiology*, 70(6), 3500–3505.
828 <https://doi.org/10.1128/AEM.70.6.3500-3505.2004>
829
830

Table 1. Physicochemical characteristics of untreated verjuice

Measurement		Value*
pH		2.58 ±0.01
Total soluble solids (°Brix)		3.70 ±0.00
Titrateable acidity (%)		1.99 ±0.03
Turbidity (NTU)		27.20 ±0.71
Absorption coefficient (cm⁻¹)		19.79 ±0.00
CIE Color parameters	L*	35.24 ±0.44
	a*	0.26 ±0.09
	b*	4.36 ±0.27
	h° (tan⁻¹(b*/a*))	86.63 ±1.04
	C* (a*²+b*²)^{1/2}	4.37 ±0.28

*: Values are the mean of three independent determinations ±standard deviation

Table 2. Experimental design of PL, MH and combined treatments

Treatment	Experiment	Treatment code	Juice layer depth (mm)	Distance from the lamp (cm)	Dose (J/cm ²)
PL	1	PL5-1	1	5	0, 6.8, 13.6, 20.4, 27.2, 34
	2	PL10-1	1	10	0, 3.4, 6.8, 10.2, 13.6, 17
	3	PL5-3	3	5	0, 6.8, 13.6, 20.4, 27.2, 34
	4	PL10-3	3	10	0, 3.4, 6.8, 10.2, 13.6, 17
	5	PL5-5	5	5	0, 6.8, 13.6, 20.4, 27.2, 34
	6	PL10-5	5	10	0, 3.4, 6.8, 10.2, 13.6, 17
Treatment	Experiment	Treatment code	Juice layer depth (mm)	Temperature	Treatment time (min)
MH	1	MH43-3	3	43	20
	2	MH45-3	3	45	20
	3	MH47-3	3	47	8.5
	4	MH43-5	5	43	20
	5	MH45-5	5	45	20
	6	MH47-5	5	47	8.5
Treatment	Experiment	Treatment code	Juice layer depth (mm)	Temperature	Dose (J/cm ²)
PLMH*	1	PLMH43-3	3	43	0, 3.4, 6.8, 10.2, 13.6, 17
	2	PLMH45-3	3	45	0, 1.7, 3.4, 5.1, 6.8, 10.2, 13.6, 17
	3	PLMH47-3	3	47	0, 1.02, 2.04, 3.06, 4.08, 5.10, 6.12
	4	PLMH43-5	5	43	0, 3.4, 6.8, 10.2, 13.6, 17
	5	PLMH45-5	5	45	0, 1.7, 3.4, 5.1, 6.8, 10.2, 13.6, 17
	6	PLMH47-5	5	47	0, 1.02, 2.04, 3.06, 4.08, 5.10, 6.12

PL: Pulsed-UV light. MH: Mild Heating. PLMH: Pulsed-UV light combined with mild heating. * distance from the lamp was 10 cm in PLMH treatments.

Table 3. Log reductions of acid-adapted *S.cerevisiae* (NRRL Y-139) inoculated into verjuice by PUV treatment at different lamp distances and juice layer thickness

Treatment code	Lamp distance (cm)	Depth of juice Layer (mm)	Log reduction (log No/N)	PUV dose (J/cm ²)
PUV5-1	5 cm	1 mm	0.96 ±0.27a	34
PUV5-3	5 cm	3 mm	0.52 ±0.01bc	34
PUV5-5	5 cm	5 mm	0.35 ±0.03bc	34
PUV10-1	10 cm	1 mm	0.60 ±0.03b	17
PUV10-3	10 cm	3 mm	0.45 ±0.04bc	17
PUV10-5	10 cm	5 mm	0.28 ±0.05c	17

Results were presented as “means± standard error”. The least significant difference was determined by Tukey pairwise comparison test. Means that do not share the same letter are significantly different ($p \leq 0.05$).

Table 4. Physicochemical, antioxidant activity and optical properties of untreated (U), combined (PLMH*) pasteurized and thermally pasteurized (P) verjuice. a) physicochemical and antioxidant activity properties, b) color properties.

a)

Treatment	pH	TSS (°Brix)	TA (%)	Turbidity (NTU)	Abs. coef. (cm ⁻¹)	AA (%)
U	2.69±0.02a	4.20±0.00b	2.59 ±0.03b	158.0±1.73b	37.78±0.72b	91.50 ±0.35a b
PLMH*	2.67±0.01a	4.53±0.06a	2.83 ±0.02a	194.0±6.56a	41.61±0.83a	92.18 ±0.21a
P	2.67±0.01a	4.10±0.00c	2.59 ±0.03b	193.3±5.51a	36.62±0.58b	90.11 ±1.13b

b)

Treatment	L*	a*	b*	C*	h°	ΔE	BI
U	24.91±0.36a	0.07±0.07b	4.16±0.11b	4.16±0.11b	88.96±1.01a	0.00±0.00a	17.86±0.62b
PLMH*	23.74±0.07b	0.28±0.05a	5.12±0.04a	5.12±0.04a	86.84±0.57a	1.54±0.36b	24.32±0.02a
P	24.42±0.23ab	0.08±0.04b	3.98±0.08b	3.98±0.08b	88.79±0.49a	0.69±0.22c	17.44±0.66b

Results were presented as “means± standard error”. The least significant difference was determined by Tukey pairwise comparison test. Means that do not share the same letter are significantly different ($p \leq 0.05$). *:PLMH47-3

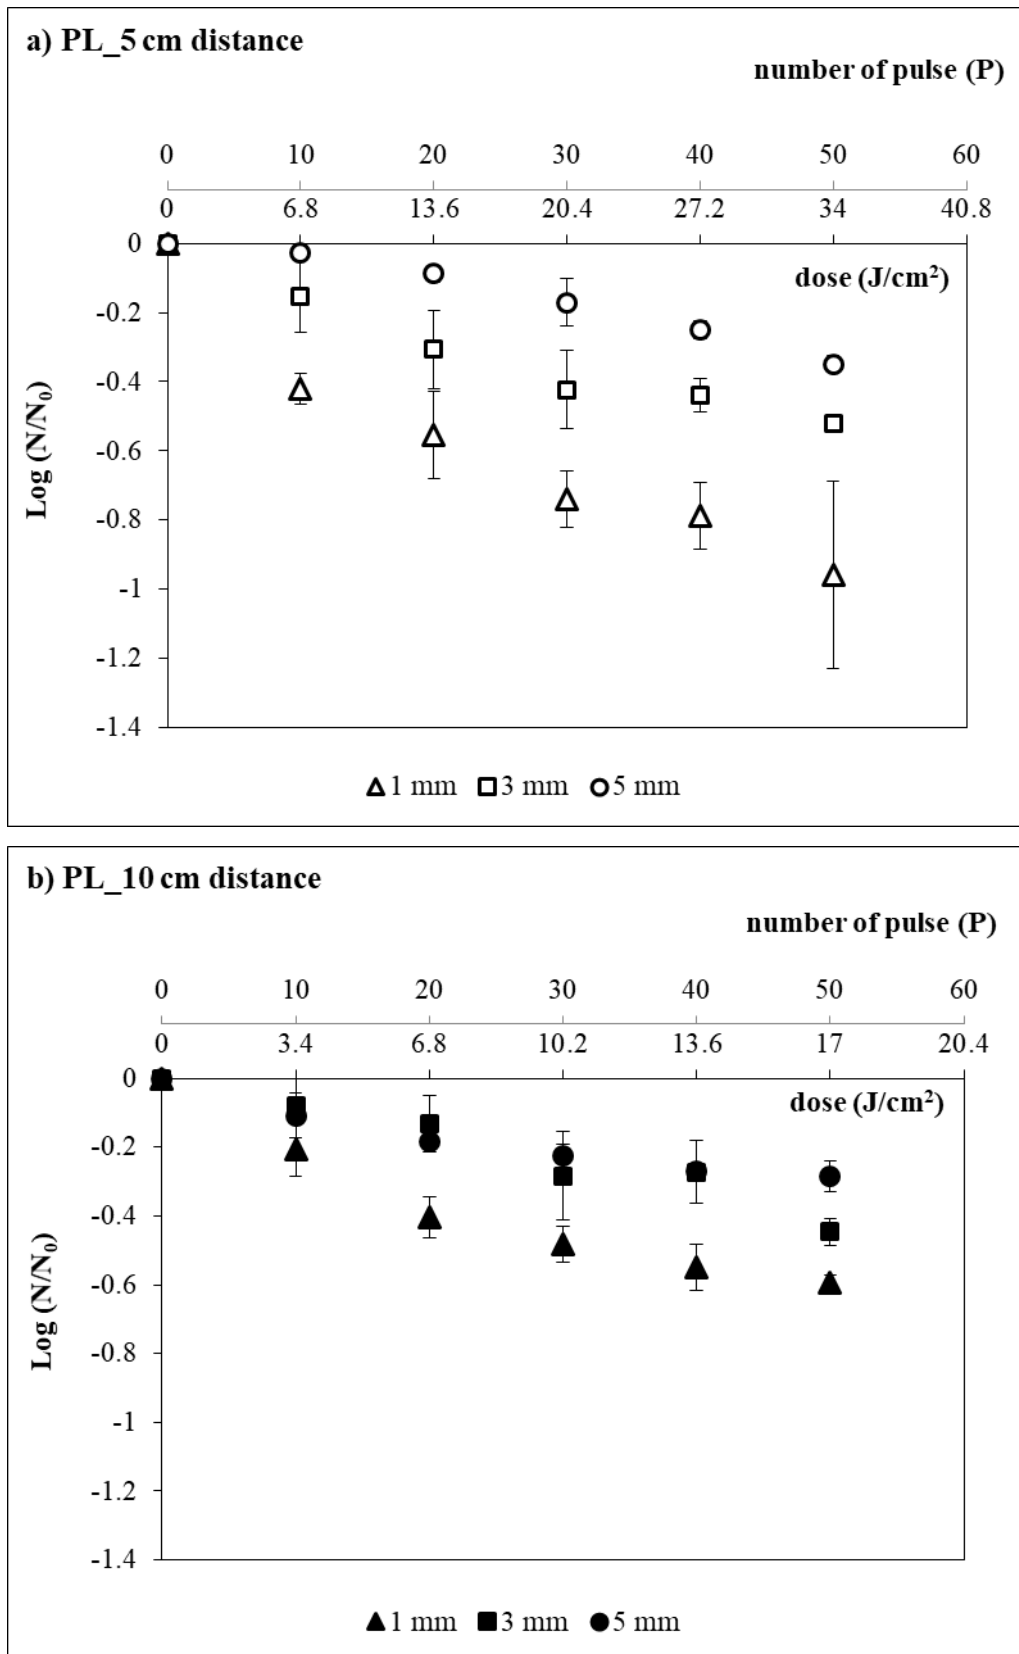


Figure 1. The inactivation of acid-adapted *S.cerevisiae* (NRRL Y-139) in verjuice by PL treatment at different lamp distance 5 cm (a) and 10 cm (b)

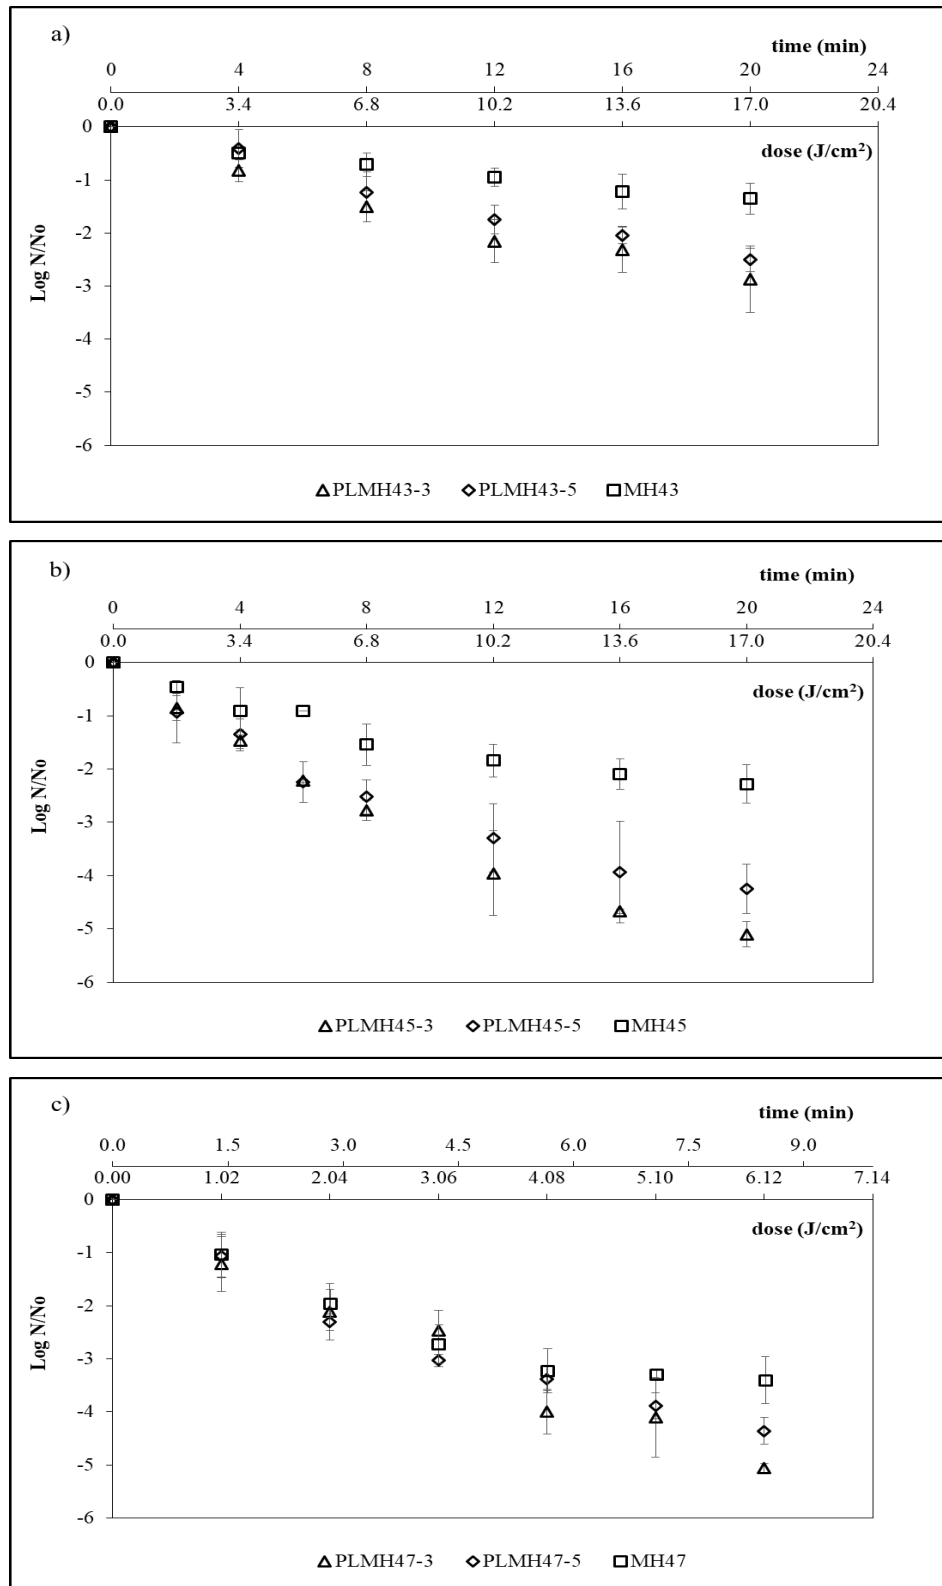


Figure 2. The inactivation of acid-adapted *S. cerevisiae* in verjuice by MH and PLMH treatments at different temperatures a) 43 °C, b) 45 °C, c) 47 °C (\square : Mild heating, \diamond : Mild heating combined with PL at 5 mm juice depth, Δ : Mild heating combined with PL at 3 mm juice depth)

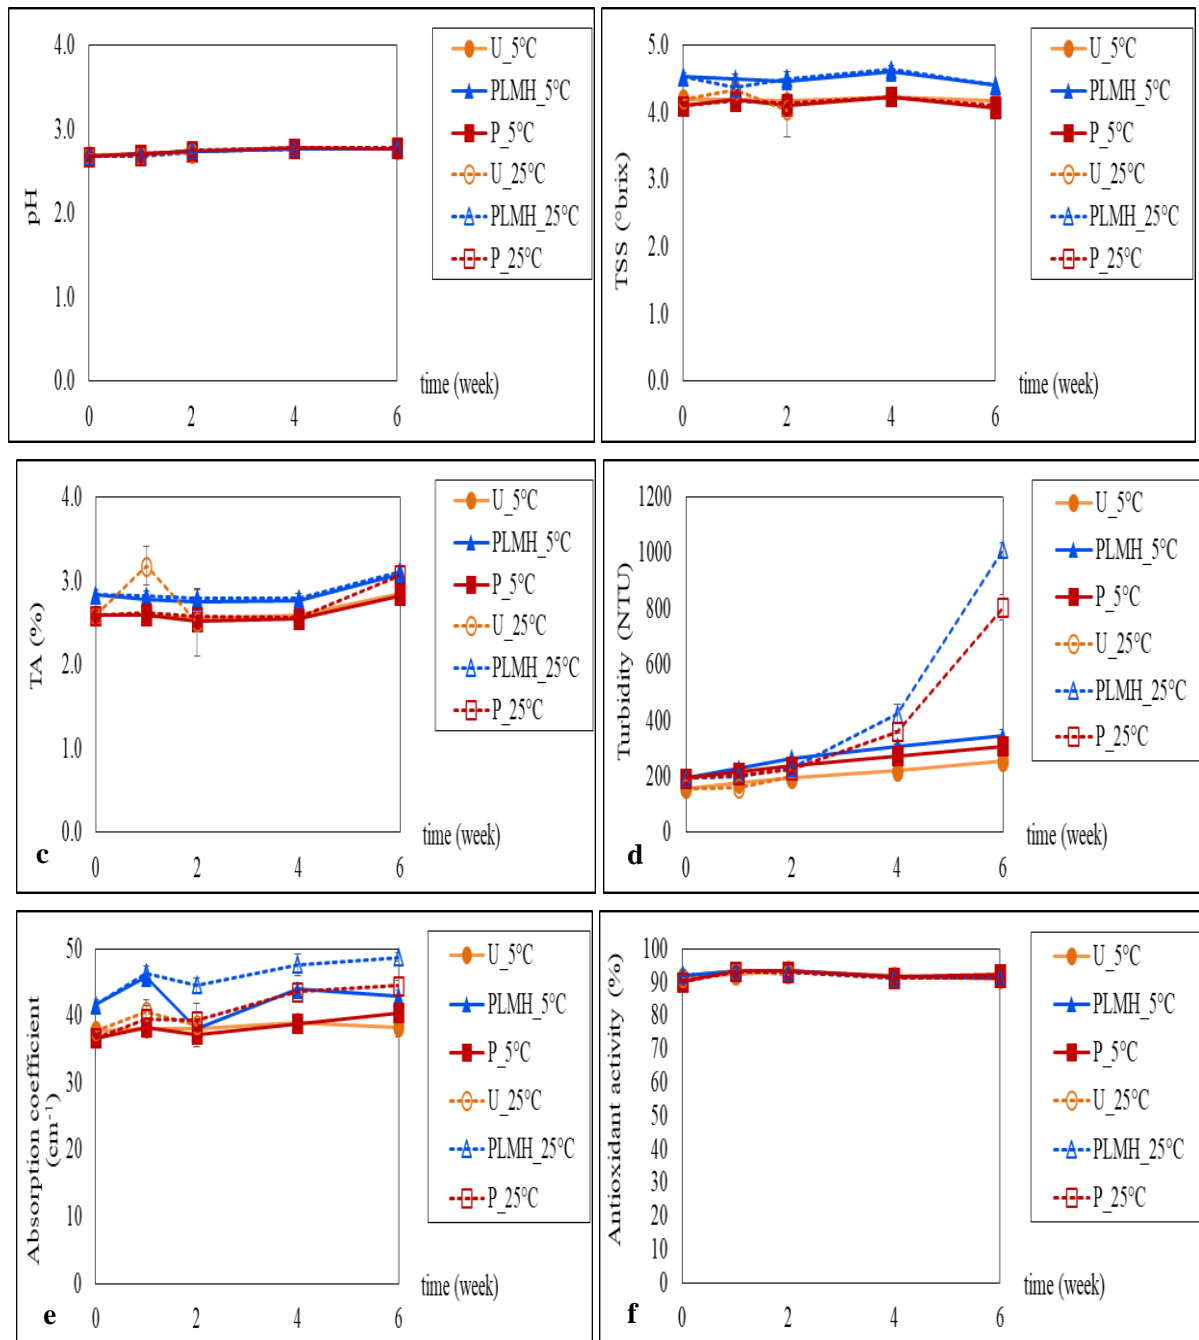


Figure 3. Change in physicochemical (a, b, c, d, e) and antioxidant (f) properties of untreated (U: circle), treated with combination of processes (PLMH*: triangle) and thermally pasteurized (P: square) verjuice during 6 weeks of storage at 5°C (solid line) and 25°C (dotted line). *: PLMH47-3

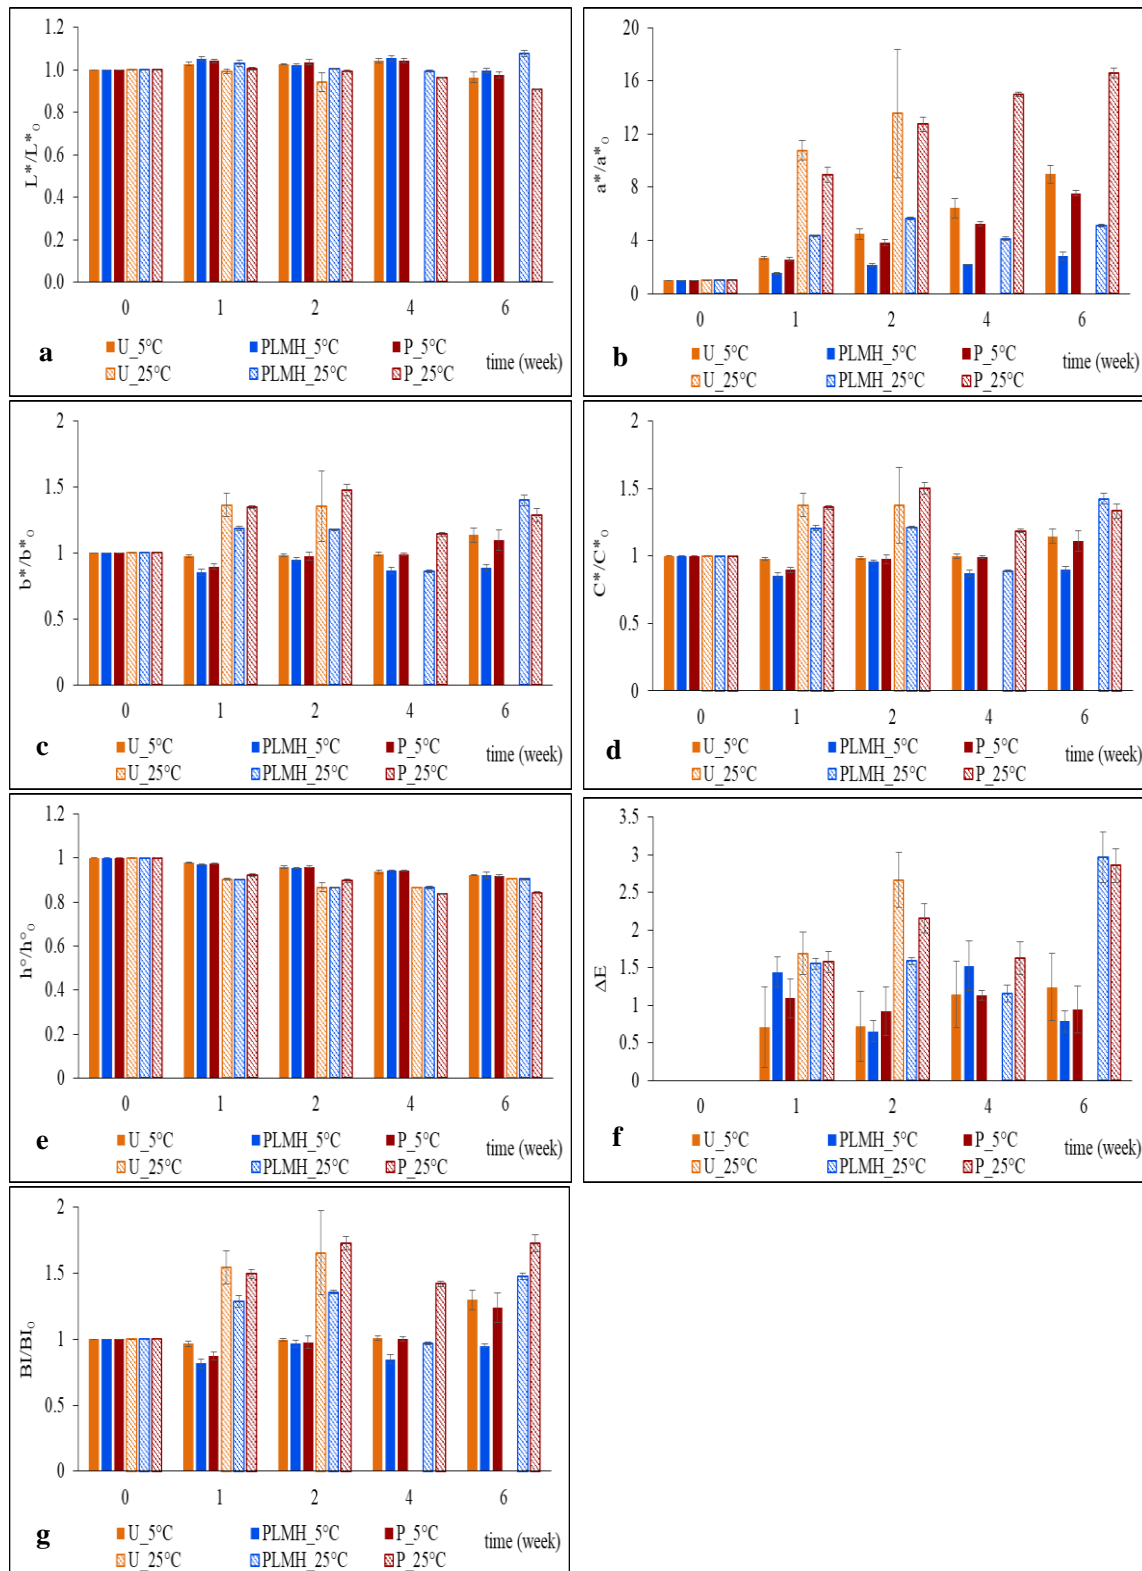


Figure 4. Changes in color properties of untreated (U: circle), combined treated (PUVMH: triangle) and thermally (P: square) pasteurized verjuice during 6 weeks at storage of 5 °C (filled bar) and 25°C (striped bar). a: L^*/L^*_0 , b: a^*/a^*_0 , c: b^*/b^*_0 , d: C^*/C^*_0 , e: h°/h°_0 , f: ΔE , g: BI/BI_0 .

*:PLMH47-3